


Starke PPH Union Ball Check Valve

Specifications

- 1) Material: PPH
- 2) Sizes: 20mm – 110mm OD, DN15-DN100
- 3) Standard: DIN, ANSI
- 4) Joint End: Socket, Threaded, Flange (ANSI/DIN)
- 5) Seat: PTFE
- 6) O-ring – EPDM, FKM (On request)
- 7) Operating Temperature: 0° C to 95° C
- 8) Working Pressure: 20mm-110mm OD – PN10

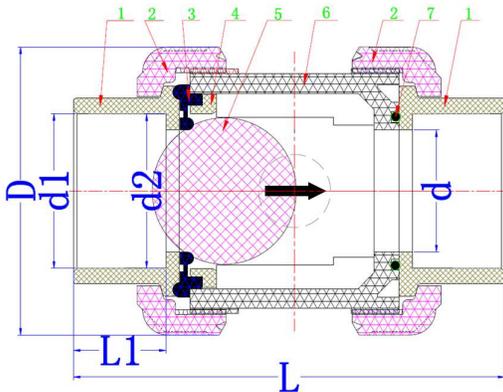

Part No.	Part	Material	Qty
1	Union End	PPH	2
2	Union Nut	PPH	2
3	Seal	EPDM / FKM	1
4	Support	PPH	1
5	Ball	PPH	1
6	Body	PPH	7
7	O-ring	EPDM / FKM	1

Size (in)	DN	d(mm)	d1(DIN)	d2(DIN)	D	L	L1
1/2"	15	15	20.30	20.00	54.00	96.00	23.00
3/4"	20	20	25.30	25.00	63.00	113.00	26.00
1"	25	25	32.30	32.00	73.50	129.00	29.00
1-1/4"	32	32	40.40	40.00	84.50	145.00	33.00
1-1/2"	40	40	50.40	50.00	98.00	157.00	35.50
2"	50	50	63.40	63.00	118.00	177.00	38.50
2-1/2"	65	63	75.50	75.00	150.00	248.00	64.50
3"	80	75	90.50	90.00	172.00	277.00	70.00
4"	100	90	110.50	110.10	190.00	357.00	84.00

STARKE PLASTICS PRIVATE LIMITED

1106, Satyamev Elite, Nr. Vakil Bridge, Bopal Approach, SP Ring Road, Ahmedabad 380058, Gujarat, India.
 GST No.: 24ABICS8591A1Z8 | M: +91 90999 74166 | Email: sales@starkeplastics.com