


Starke PVDF Y Strainer

Specifications

- 1) Material: PVDF
- 2) Sizes: 1/2" - 4"; 20mm - 110mm, DN15-DN100
- 3) Standard: DIN
- 4) Joint End: Socket, Threaded (NPT, PT, BSPF), Fusion, Welding, Flanges
- 5) O-ring – FKM/Viton
- 6) Operating Temperature: -40 Deg C to 150 Deg C
- 7) Working Pressure: 150 PSI

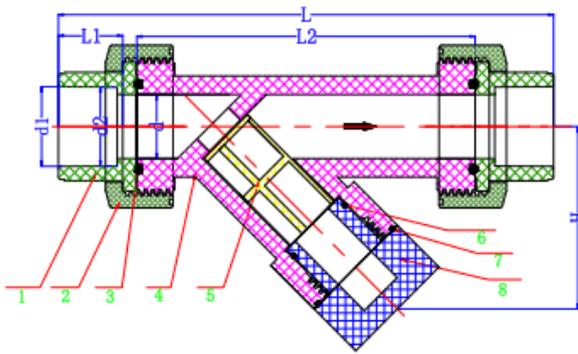

Part No.	Part	Material	Qty
1	Union End	PVDF	2
2	Union Nut	PVDF	2
3	ORING	FKM	4
4	BODY	PVDF	1
5	STRAINER	PVDF	1
6	ORING	FKM	4
7	ORING	FKM	4
8	PLUG	PVDF	1

Size (in)	DN	d (mm)	d1 (mm) (DIN)	d2 (mm) (DIN)	L (mm)	L1 (mm)	L2 (mm)	H (mm)
1/2"	15	15	20.25	20.05	184	22.3	110	55
3/4"	20	20	25.25	25.05	187	26	125	66
1"	25	25	32.25	32.05	205	29	138	75
1-1/4"	32	32	40.25	40.05	252	32.5	149	82
1-1/2"	40	40	50.25	50.05	268	35.5	189	105
2"	50	50	63.25	63.05	305	38.5	222	135
2-1/2"	65	63	75.25	75.05	378	64.5	268	168
3"	80	75	90.35	90.05	440	70	330	220
4"	100	90	110.35	110.05	565	84	420	300

STARKE PLASTICS PRIVATE LIMITED

1106, Satyamev Elite, Nr. Vakil Bridge, Bopal Approach, Ahmedabad - 380058, Gujarat, India
 GST No.: 24ABICS8591A1Z8 | M: +91 90999 74166 | Email: sales@starkeplastics.com