


## Starke PVDF Diaphragm Valve

### Specifications

- 1) Material: PVDF
- 2) Sizes: 1/2" - 4"; 20mm - 110mm, DN15-DN100
- 3) Standard: DIN
- 4) Joint End: Socket, Threaded (NPT, PT, BSPF), Fusion, Welding, Flanges
- 5) O-ring – FKM/Viton
- 6) Operating Temperature: -40 Deg C to 150 Deg C
- 7) Working Pressure: 150 PSI / PN10

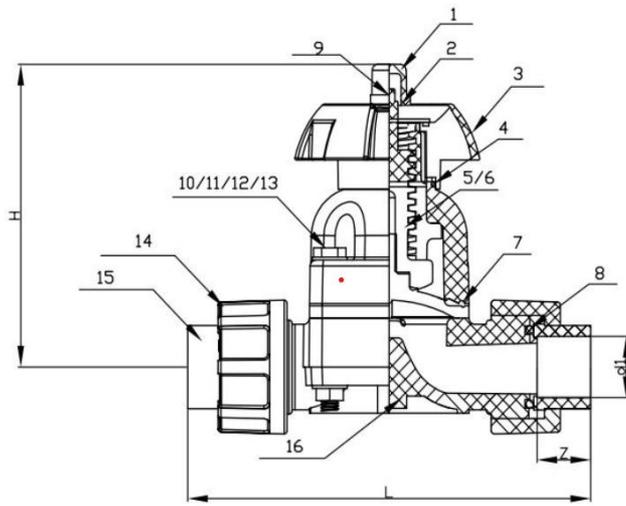

Part No.	Part	Material	Qty
1	INDICATOR COVER	PS	1
2	INDICATOR ORING	EPDM	1
3	HANDWHEEL	PP	1
4	HANDWHEEL ORING	EPDM	1
5	DRIVE SHAFT / NUT	PP	1
6	DRIVE SHAFT / NUT	PP	1
7	DIAPHRAGM	FKM	1
8	ORING	FKM	1
9	INDICATIONG ROD	PP	1
10	BOLTS/NUTS	STAINLESS STEEL	1
11	BOLTS/NUTS	STAINLESS STEEL	1
12	BOLTS/NUTS	STAINLESS STEEL	1
13	BOLTS/NUTS	STAINLESS STEEL	1
14	UNION NUT	PVDF	2
15	UNION END	PVDF	2
16	VALVE BODY	PVDF	1

Size (in)	DN	L (mm)	H (mm)	Z (mm)	d1 (mm) (DIN)
1/2"	15	140	99	18	20.3
3/4"	20	142	99	21	25.3
1"	25	176	136	26	32.3
1-1/4"	32	180	136	28	40.35
1-1/2"	40	245	178	37	50.35
2"	50	258	178	37	63.4
2-1/2"	65	343	240	42	75.4
3"	80	365	240	50	90.45
4"	100	568	277	69	110.35

### STARKE PLASTICS PRIVATE LIMITED

1106, Satyamev Elite, Nr. Vakil Bridge, Bopal Approach, Ahmedabad - 380058, Gujarat, India  
 GST No.: 24ABICS8591A1Z8 | M: +91 90999 74166 | Email: sales@starkeplastics.com