


## Starke PPH Union Diaphragm Valve

### Specifications

- 1) Material: PPH
- 2) Standard: DIN
- 3) Joint End: Union End
- 4) Seat: PTFE
- 5) O-ring: EPDM
- 6) Operating Temperature: 0 Deg C to 100 Deg C
- 7) Working Pressure: PN10

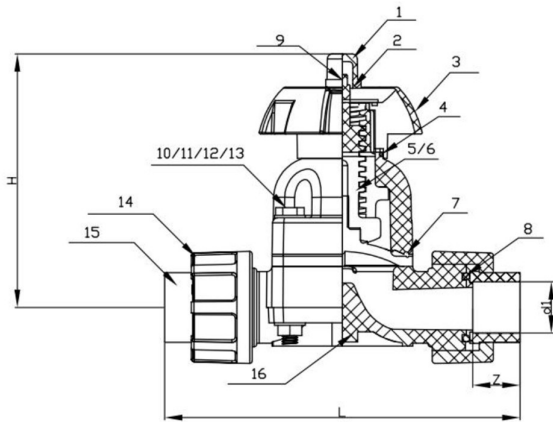

| Item | Part                      | Material        | Qty |
|------|---------------------------|-----------------|-----|
| 1    | Transparent Cover         | PS              | 1   |
| 2    | Cover O-ring              | EPDM            | 1   |
| 3    | Hand Wheel                | PP              | 1   |
| 4    | O-ring                    | EPDM            | 1   |
| 5    | Drive Shaft/Nut           | PP              | 1   |
| 6    | Drive Shaft/Nut           | PP              | 1   |
| 7    | Diaphragm                 | FKM/PTFE        | 1   |
| 9    | Indicating Rod            | PP              | 1   |
| 10   | Bolt, nut, gasket, sleeve | Stainless Steel | 4   |
| 11   | Body                      | PPH             | 1   |

| Size (in) | OD (mm) | L (mm) | H (mm) | Z (mm) | d1 (mm) |
|-----------|---------|--------|--------|--------|---------|
| 1/2"      | 20      | 140    | 99     | 18     | 19.2    |
| 3/4"      | 25      | 142    | 99     | 21     | 24.2    |
| 1"        | 32      | 176    | 136    | 26     | 31.1    |
| 1-1/4"    | 40      | 180    | 136    | 28     | 39      |
| 1-1/2"    | 50      | 245    | 178    | 37     | 49      |
| 2"        | 63      | 258    | 178    | 37     | 61.9    |
| 2-1/2"    | 75      | 343    | 240    | 42     | 73.7    |
| 3"        | 90      | 365    | 240    | 50     | 88.6    |
| 4"        | 110     | 568    | 277    | 69     | 108.4   |

**Remarks:** Valve diagram is for representation purpose.

### STARKE PLASTICS PRIVATE LIMITED

1106, Satyamev Elite, Nr. Vakil Bridge, Bopal Approach, Ahmedabad - 380058, Gujarat, India  
GST No.: 24ABICS8591A1Z8 | M: +91 90999 74166 | Email: sales@starkeplastics.com