


## Starke PVDF Union Ball Check Valve

### Specifications

- 1) Material: PVDF
- 2) Sizes: 20mm – 63mm OD, DN15-DN50
- 3) Standard: DIN
- 4) Joint End: Socket, Flange (DIN)
- 5) Seat: PTFE
- 6) O-ring – FKM
- 7) Operating Temperature: - 40 Deg C to 150 Deg C
- 8) Working Pressure: PN10

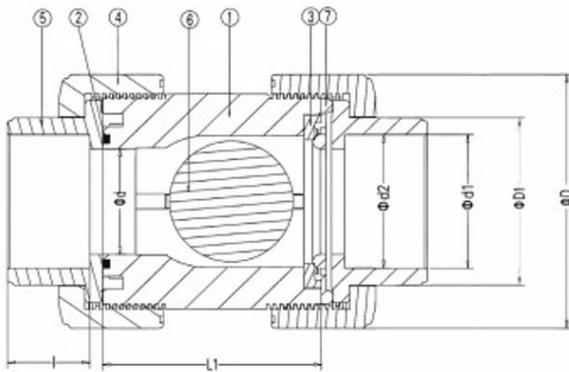

Part No.	Part	Material	Qty
1	Body	PVDF	2
2	O-ring	FKM	2
3	Seat	PTFE	1
4	Union	PVDF	1
5	Socket	PVDF	1
6	Ball	PVDF	7
7	O-ring	FKM	1

Size (in)	OD (mm)	l (mm) (DIN)	d1 (mm) (DIN)	d2 (mm) (DIN)	d (mm)	D (mm)	D1 (mm)	L1 (mm)
1/2"	20	22	18.4	18.2	13	45	30.1	40.2
3/4"	25	24	23.8	23.1	18	55	35	55
1"	32	27	29.5	29.2	22.1	65	42	59
1-1/4"	40	34.2	38.2	38	38.5	96	51.3	89.2
1-1/2"	50	32	48.3	47.9	38.5	96.3	61.2	89.2
2"	63	37.8	61.3	60.9	47.5	117.2	75.5	98.6

### STARKE PLASTICS PRIVATE LIMITED

1106, Satyamev Elite, Nr. Vakil Bridge, Bopal Approach, Ahmedabad - 380058, Gujarat, India  
GST No.: 24ABICS8591A1Z8 | M: +91 90999 74166 | Email: sales@starkeplastics.com