


Starke PVDF Butterfly Valves

Specifications

- 1) Material: PVDF
- 2) Sizes: 32mm – 200mm OD, DN25-DN200
- 3) Standard: DIN / ANSI
- 4) Connection Type: Flange
- 5) Operating Temperature: -30 to 140 Deg. C
- 6) Working Pressure: PN10
- 7) Operation: Manual Lever
- 8) Colour: Natural/White

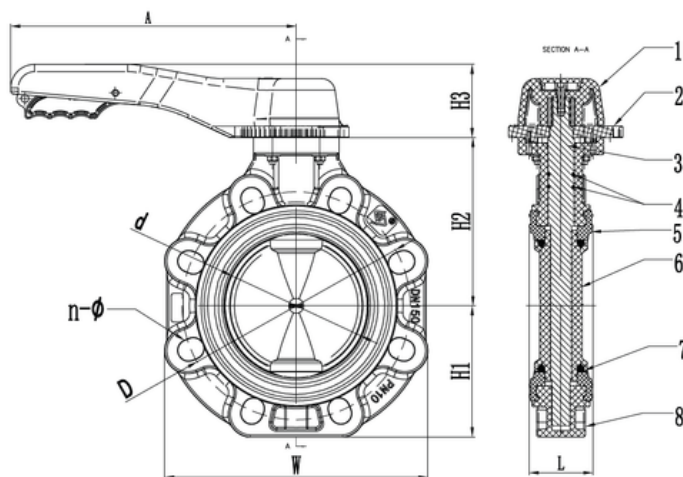

Part No.	Part	Material
1	Handle	ABS
2	Locking Plate	PVDF
3	Stem	Stainless Steel
4	O-ring	FKM
5	Seat	FKM
6	Disc	PVDF
7	Sealing Gasket	FKM
8	Body	PVDF

All dimensions are in mm

Size (in)	DN	d(mm)	D		L	W	H1	H2	H3	A	n		Torque (n.m)
			DIN	ANSI							DIN	ANSI	
1"	25	35	85	79	37	125	72		56	220	4	4	
1-1/4"	32	35	100	89	37	125	72		56	220	4	4	
1-1/2"	40	47	110	98	38	150	86		56	220	4	4	30
2"	50	56	125	121	40	160	80	108	56	220	4	4	35
2-1/2"	65	70	145	140	45	175	88	118	56	220	4	4	40
3"	80	80	160	152	47	195	98	130	75	250	8	4	45
4"	100	100	180	190	56	225	112	145	75	250	8	8	55
5"	125	125	210	216	62	253	126	162	77	300	8	8	80
6"	150	150	240	241	67	277	138	177	77	300	8	8	130
8"	200	200	295	298	86	330	165	210	77	300/400	8	8	200

Last Update 09/2025

Starke Plastics Private Limited

1106, Satyamev Elite, Nr. Vakil Bridge, Bopal Approach, Ahmedabad 380058, Gujarat, India

+91 9099974166

www.starkeplastics.com

sales@starkeplastics.com

